

S2 EXTENSIONS DEMYSTIFIED

By Koen Willems,
Newtec Market Director
Government & IP Trunking

DVB-S2 is the most accepted and widely spread standard in the satellite market. The standard has a deep market penetration in Sports and News Contribution, Professional Video Distribution solutions, IP trunking and Cellular backhauling, Broadband VSAT solutions up to Government and Defense networks over satellite.

In a fast moving satellite world new technologies (HTS, HEVC, UHD TV) emerge and data rates increase at an accelerated pace. Within applications such as Contribution and IP Trunking the efficiency requirements are already testing the limits of the DVB-S2 standard. The risk for a massive take-over by proprietary technologies with better performance is realistic. A proprietary scenario would disperse the satellite industry, increase the cost of satellite communications as well as prevent interoperability and result in vendor lock-in.

A new standard (or extension to DVB-S2) with improved efficiency will give the satellite industry more breathing space to increase profitability and allow for business growth throughout all applications, from High Speed IP to Broadcast to VSAT.

The efficiency technologies contributed by Newtec to the new DVB standard boost the satellite link up to 20% in Direct-To-Home networks and 64% in other professional applications compared to DVB-S2. These gains already exceed the results by proprietary systems in the market today.

Introduction

Kick-started by Newtec in the course of 2012, key players in the satellite industry are calling for a new satellite transmission standard, specifically for professional satellite contribution links, which would extend the existing DVB-S2 standard.

The satellite world has changed a lot since DVB-S2 was first published in 2005. Higher speeds, more efficient satellite communication technology and wider transponders are required to support the exchange of large and increasing volumes in data, video and voice over satellite. The biggest demand for the extensions to the DVB-S2 standard comes from video contribution and high-speed IP services, as these services are affected the most by the increased data rates.

In the long run more throughput will be required for Direct-to-Home applications as well with the rise of Ultra-High Definition TV (UHDTV) and the High Efficiency Video Coding (HEVC) video compression standard to support the request of higher quality images by the market. Ultimately, for satellite businesses, the creation and adoption of these extensions will translate to higher efficiency, higher speed and greater service robustness to increase business and therefore revenues.

The combination of technologies incorporated in the new standard results in a gain of up to 20% for DTH networks and 64% for other professional applications compared to DVB-S2.

Many vendors, operators and satellite specialists within the industry agree with DVB and are working towards these new extensions.

As the official naming by DVB has not been decided yet, we will refer to the bundle of improved candidate technologies for the new standard as S2 Extensions.

The Market is in (R)evolution

Satellite's Challenge against Fiber

Changes have never occurred so rapidly in the satellite industry as today. The increasing penetration of terrestrial communication alternatives has put satellite under pressure.

A common misconception is that fiber will entirely replace satellite sooner or later. Use cases, economic considerations and new technologies prove that satellite still has value for years to come. Terrestrial and satellite communications are more likely to cohabitate in network structures and will be selected depending on the application.

Breakthrough Technologies Change the Game

High Throughput Satellites (HTS) and efficiency technologies have changed the game. More bandwidth capacity will become available and prices per megabit will drop. Both HTS and efficiency technologies blow oxygen into satellite service provider's profitability and growth.

Efficiency technologies allow for more throughput in the same bandwidth or to save on OPEX. In technical terms, efficiency technologies push more bits through the same Hertz.

What can be done with these extra megabits? Examples throughout different applications demonstrate the benefits:

- In a VSAT environment more users can be added to the network resulting in extra revenue. Higher SLA's become possible increasing the user experience.
- Broadcasters can add more TV channels to their offering and increase the quality of the image.
- Extra revenues can be achieved by adding services in a multiservice context.

The impact of efficiency technologies and HTS is so big in the satellite market; that the standardization of these technologies cannot be delayed.

Impact of Standards

Why Standards?

In the satellite industry there will always be a field of tension between open standards and proprietary technologies. Although in the short term proprietary technologies might be the best option to acquire quick revenues, in the long run the availability of open standards will benefit the entire satellite industry for the following reasons:

- Open standards **create an eco-system** that spurs companies to develop new solutions based on common building blocks
- Open standards **reduce the barrier** for entry for companies to develop new solutions for satellite communications
- Open standards create an **economy of scale** that allows a reduction in the cost of equipment and increases the profitability of the industry
- Open standards **avoid vendor lock-in** and allow multiple vendors to enter the network, lowering the overall risk of high pricing, companies going bankrupt or non-availability of spare parts
- Open standards increase the **quality of products** as the technical implementation is supported by multiple organizations.
- Open Standards allow for **interoperability** between different government, NGOs and commercial organizations increasing the effectiveness of operations in the field.

The impact of standardization increases the quality of life in both developed and developing countries. Standards for satellite communications allows people to connect all over the world to the information highway to give them better access to education, to (welfare) services, to economical, political and social involvement.

Which Markets Will Quickly Adapt to S2 Extensions?

The satellite industry has come to a consensus that a successor to the DVB-S2 standard is required to accommodate for increased profitability, inter-operability and growth in the professional satellite communications market.

Newtec has taken the lead and teamed up with other DVB-members in order to define and develop the update on the DVB-S2 standards. The current DVB-S2 standard has served the industry well, but it is now close to 10 years old.

The satellite industry will benefit from an extended standard in line with today's technological advances. Through the new standard (S2 Extensions) better efficiencies and throughputs over satellite will be obtained.

Up until now the DVB-S2 standard has been the solution for a wide scope of applications over satellite including distribution applications such as Direct-to-Home (DTH). For distribution activities broadcasters are likely to continue to use the existing DVB-S2 standard for some time. But with the new higher resolution technologies like ultra high definition TV (UHDTV) and High Efficiency Video Coding (HEVC) video compression about to hit the market, and the drive for more content, in the longer term the new S2 Extensions will be adopted for DTH networks as well.

We are likely to see an immediate take-up in applications that require high throughput over satellite for professional use and in applications that suffer for bandwidth or need better margins to remain profitable.

The applications that will adapt quickly to the S2 Extensions are:

- IP Trunking & IP/Telecom Backbones
- Broadcast Contribution and Exchange
- IP Backhauling & Professional IP Access
- Government High Speed Communications & Disaster Recovery
- Multi-Service networks over satellite

The Innovations behind S2 Extensions

The successor to the DVB-S2 standard is a combination of innovative technologies that improve overall efficiency over satellite links.

- The technologies involved in S2 Extensions are:
- Low roll off, smaller carrier spacing and advanced filter technologies
 - MODCOD and FEC upgrades (more granularity, adding 64 APSK, improving FECs & MODCODs and differentiating linear & non-linear MODCODs)
 - Wideband (72 Mbaud) implementation.

These technologies and their intrinsic benefits will be described in more detail in the sections below.


Smaller Roll-Offs and Advanced Filtering Technologies

The new S2 Extensions include a combination of smaller roll-offs (5%, 10%, 15%) and introduces advanced filtering technologies to allow optimal carrier spacing. Compared to DVB-S2 the combination brings efficiency gains up to 15%.

Improvement 1: Smaller Roll-Offs

A first innovation inside the new standard implements a smaller Roll-Off (RO) percentage than currently used in the DVB-S2 standard. In the DVB-S2 standard the 20% and 25% Roll-Off percentages are common and are an integral part of the modulated carrier (i.e. symbol rate plus Roll-Off).


Reducing Roll-Offs to 5%, 10% and 15% results in a direct gain in bandwidth. Looking at the spectral image when implementing smaller Roll-Offs the slope of the carrier becomes steeper compared to DVB-S2 but still fits nicely in the allocated bandwidth.

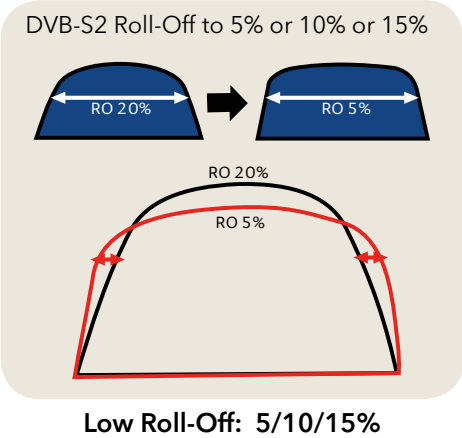

The efficiency gain by implementing smaller roll-offs can go up to 15%. When implementing smaller roll-offs every network and/or link needs to be checked individually as immediately switching towards 5% roll-off does not always bring the best efficiency. In some cases 10% roll-off will give better results.

Improvement 2: Advanced Filtering Technologies for Improved Carrier Spacing

The second innovation deals with noise levels (side lobes) on both sides of the carrier. These side lobes prevent putting satellite carriers close to each other. Applying advanced filter solutions has an immediate effect on bandwidth savings as the spacing between carriers can be put as close as 1.05 times their symbol rates (or even closer in some specific use cases).

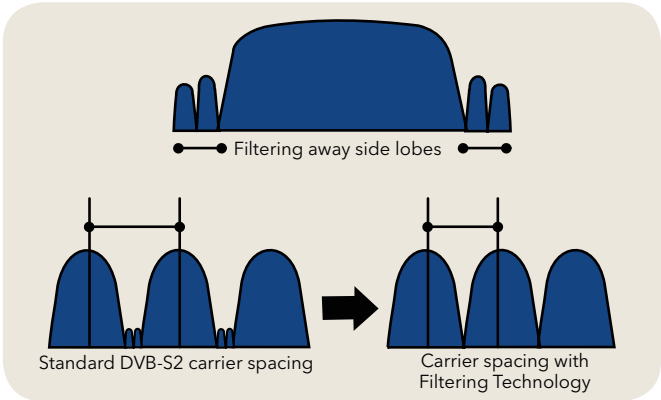


Optimal Carrier Spacing

It is important to note that even with 35%, 25% and 20% Roll-offs better filtering results are obtained. The improvement has the best effect when the ground station High Power Amplifier (HPA) is driven close to saturation. The spectral regrowth at a frequency offset (= symbol rate) will be lower with the better filtering. Meaning, at saturation the result will have a much cleaner signal spectrum.

Improvement 3: Supporting Different Network Configurations

The Roll-Off and filtering innovations within the new standard can be applied in satellite links with single carriers (mainly Roll-Off effect), multiple carriers (Filtering and Roll-Off effects) or carriers sharing the same transponder with other providers. In the latter case S2 Extensions carriers

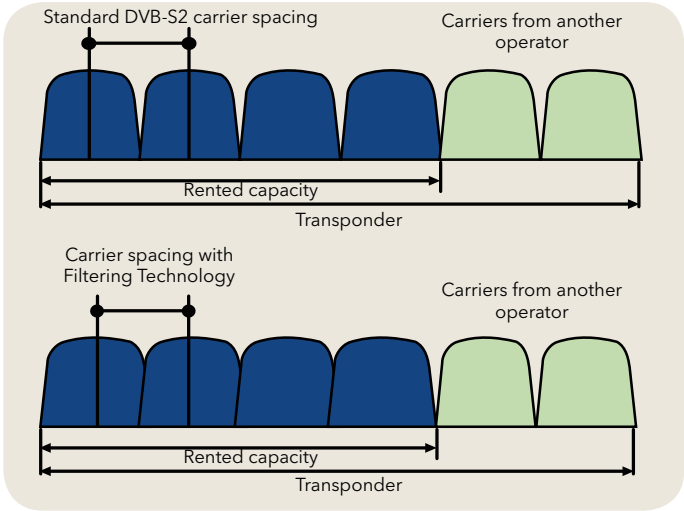

Shared Transponder Support

easily co-exist with adjacent carriers from other operators within the same transponder. The improved roll-offs and filtering technologies are only applied on the allocated carriers. Neighboring carriers will not be affected and do not notice any form of interference.

S2 Extensions MODCOD and FEC Upgrades


Improvement 4: Increased Granularity in MODCODs

As a next step the S2 Extensions increase the modulation and coding (MODCOD) schemes and Forward Error Correction (FEC) choices compared to DVB-S2.

By introducing an increased granularity the highest resolution for optimal modulation in all circumstances can be provided. The current DVB-S2 quantization steps are quite far apart. By adding granularity in the upcoming standard the service provider can further optimize the satellite link depending on the application. In combination with Adaptive Coding and Modulation (ACM), where the highest MODCOD is selected automatically, full efficiency can be gained. The amount of MODCODs has grown from 28 in DVB-S2 up to 87 in the S2 Extensions bringing efficiency as close to the theoretical Shannon limit as possible.

Improvement 5: Higher Modulation Schemes up to 64APSK

Adding higher modulation schemes such as 64APSK proves to be useful considering the professional applications that work with improved link budgets provided by, for example, bigger antennas (more powerful satellites that become available). Newtec sees the 32APSK boundary being reached frequently with its auto-adaptive FlexACM® technology during clear weather conditions. In these situations 64APSK is highly beneficial. When combining the increased granularity (MODCODs and FECs) and 64APSK (higher order modulation and coding) immediate efficiency gains up to 37% can be achieved compared to DVB-S2 (see figure below).

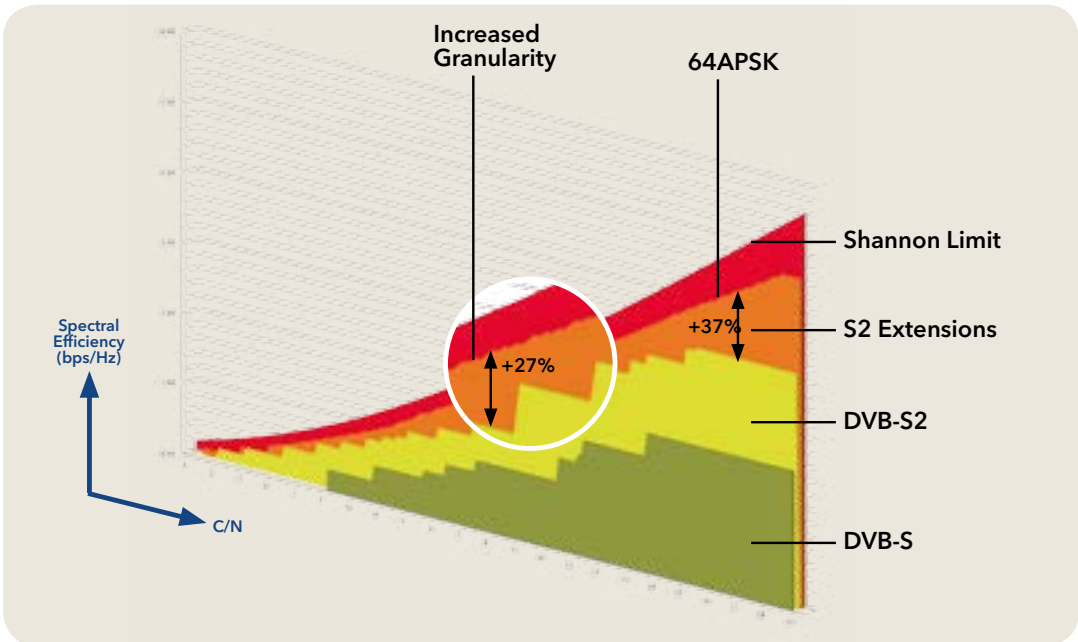

S2 Extensions compared to DVB-S2 (64APSK & increased granularity)

Improvement 6: Different Classes for linear and non-linear MODCODs

Different to DVB-S2, the MODCODs in the S2 Extensions have two different classes for linear and non-linear MODCODs. Since the DVB-S2 MODCODs are focused on DTH, the constellations are well suited for distribution applications with quasi-saturated transponders. For high-speed data and contribution applications other constellations can be considered where the performance gain is larger than 0.2dB. Although the MODCODs might use the same code/name, the linear and non-linear MODCODs are not interchangeable. Additionally the MODCODs and FECs themselves have been improved compared to the DVB-S2 standard to achieve even better efficiency levels.

Wideband

Improvement 7: Wideband Support up to 72 Mbaud

The S2 Extensions support technology for typical wideband transponders that become/are available today hosting high-speed data links.


The wideband implementation (up to 72 Mbaud) in S2 Extensions typically addresses satellite transponders with bandwidths from 72 MHz (typically C-band) up to several hundred MHz (Ka-band, HTS). In principle it would be

possible to allocate several narrower channels inside the wideband transponders, but this would require the operation of the satellite transponder with reduced downlink power and therefore at sub-optimal efficiency. The S2 Extensions demodulator will receive the complete wideband signal up to 72 Mbaud resulting in a very high data rate. The introduction of the wideband technology adds extra 20% efficiency gain.

S2 Extensions Technology Results

When comparing the current DVB-S2 standard against the full implementation of S2 Extensions (activating smaller Roll-Offs, advanced filtering, 64 APSK and wideband) staggering efficiency gains up to 64% can be achieved for professional applications over satellite. For DTH networks up to 20% efficiency increase can be obtained. These gains already exceed the results by proprietary systems in the market today.

In the figure below, DVB-S2 with 20% roll-off is compared with S2 Extensions and 5% roll-off. The main efficiencies are located in the higher MODCODs. Herein resides the reason why the S2 Extensions standard first targets data rate hungry applications such as Broadcast contribution and exchange, TSoIP Contribution & Primary Distribution, IP backbones and IP Trunking related configurations (IP Access, IP Backhaul, Government high speed communications).

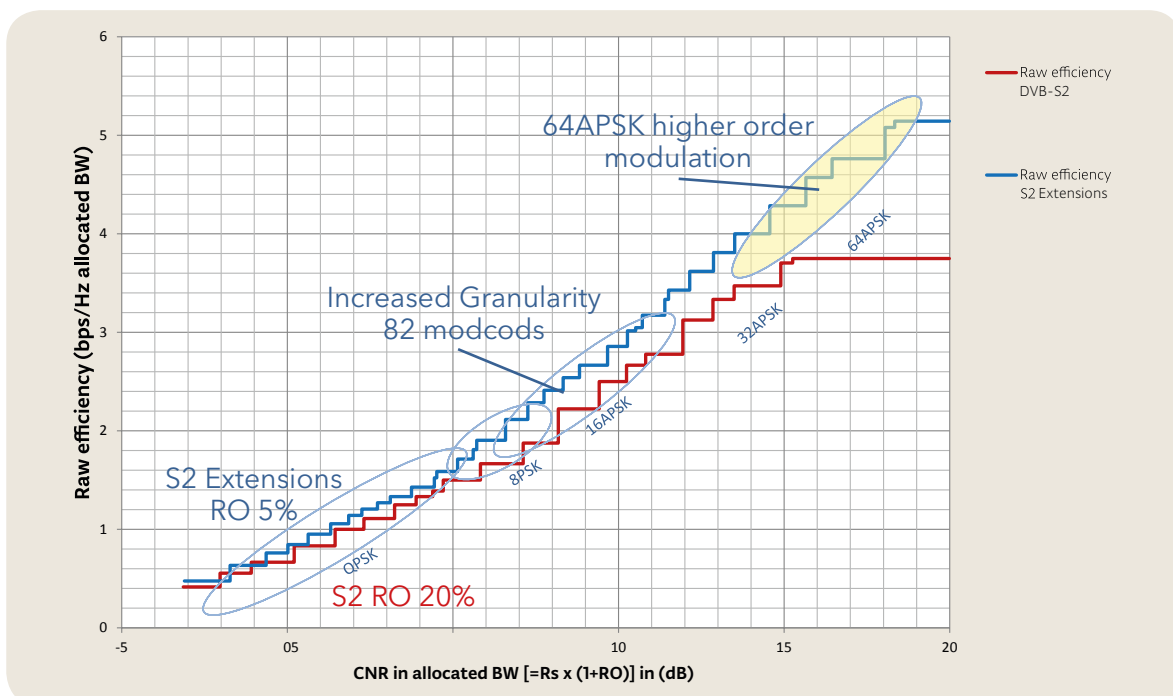

S2 Extensions with RO 5% compared to DVB-S2 with RO 20%

Newtec Implementation of the S2 Extensions

The smaller Roll-Offs and advanced filtering technologies were already introduced by Newtec as early as September 2011 as a first step towards the new S2 Extensions standard through Newtec's Clean Channel Technology®.

Clean Channel Technology is available on Newtec's professional equipment. Both as a software field upgrade for installed based equipment as well as new Newtec equipment.

In the meantime Newtec has invested a lot in its innovative technology to add to the new S2 Extensions standard. Newtec's contribution to the new S2 Extensions standard has resulted in the technology candidates that are already implemented on Newtec's MDM6100 Broadcast Satellite Modem, HUB6000 Satellite Hub and MDM6000 Satellite Modem. The modem integrates all S2 Extensions innovations on board, from smaller Roll-Offs, advanced filtering, MODCODs and FEC upgrades to wideband support.

On top of the DVB-S2 Extensions the MDM6000 modem can be used in combination with technologies such as Adaptive Coding & Modulation (ACM), Pre-distortion, bandwidth cancellation, network optimization software and cross-layer-optimization to bring the efficiency of the satellite link to the highest level at maximum service availability.

How to Increase Efficiency and Availability of a Satellite Link on Top of S2 Extensions

When adding technologies such as Adaptive Coding & Modulation (ACM), bandwidth cancellation, pre-distortion, network optimization software and cross-layer optimization to the S2 Extension innovations, the final bits can be squeezed through the available bandwidth, bringing the satellite link to full optimization.

Adaptive Coding & Modulation

Adaptive Coding & Modulation (ACM) auto-adaptively sets modulation parameters to the optimal point to overcome fading or interference conditions and allows for the best possible throughput.

Newtec's implementation of ACM, called FlexACM® combines the adaptive modulation with noise and distortion estimation technology (NoDE) and predictive technology on upcoming variation (ThIMM) to get as close to the zero margin limit as possible allowing the full use of the satellite link at maximum service availability.

Pre-distortion Technology

Pre-distortion technologies are typically designed to compensate for the effects of imperfections in the filters and amplifiers of the satellite.

Newtec's implementation of pre-distortion technology, Automated Equalink®, improves the performance of the end-to-end satellite communication channel by a typical 2 dB and allows the use of higher modulation schemes such as 16/32APSK or 64APSK on carriers occupying a full transponder.

Newtec's Equalink® brings up to 10% bandwidth efficiency gain even in saturated non-linear transponders (which is the use case for very high speed links). Moreover a better Quality-of-Service (QoS) can be achieved.

Bandwidth Cancellation

Bandwidth Cancellation Technology combines the forward and return transmissions in the same satellite bandwidth opening up extra capacity (up to 33%) for the service provider. This extra capacity gives room for considerable OPEX savings or deployment expansions by adding services within the same available bandwidth.

Cross-Layer Optimization™

Cross-Layer-Optimization™ is the technology that allows the satellite modulation equipment to be in continuous interaction with Acceleration, Compression, Bandwidth Management and IP Shaping technology. As soon as a satellite link condition changes the link will be auto-optimized following Quality-of-Service and Priority Settings without the loss of data or link.

Conclusion

The satellite industry has come to a consensus that a successor to the DVB-S2 standard is required to accommodate for increased profitability, interoperability and growth in the professional satellite communications market. Newtec has taken the lead and teamed up with other DVB-members in order to define and develop the update on the DVB-S2 standard.

Applications such as Sports and News Contribution, IP trunking and Cellular backhauling up to Broadband VSAT solutions will immediately benefit from the gains achieved by the new standard. As soon as Ultra High Definition TV hits town and more content is required by the market, the Professional Video Distribution and Direct-to-Home applications will quickly follow.

Newtec's contribution to the new standard (naming still to be decided by the DVB organization) consists of a number of efficiency technologies, such as

- smaller Roll-Offs,
- advanced filter technologies
- increased granularity in MODCODs,
- higher Modulation (64APSK)
- Wideband (72 Mbaud).

By combining these technologies an efficiency optimization up to 64% can be obtained in a professional satellite link. For DTH networks the gain will be around 20%.

The Newtec MDM6000 Satellite Modem integrates the candidate technologies combined with Newtec efficiency technologies (FlexACM®, Equalink®, Bandwidth Cancellation and Cross-Layer-Optimization™) and guarantees the best performance with barrier-breaking throughputs at optimal service availability.

More Information:



For more information read:
MDM6000 leaflet
MDM6100 leaflet
HUB6000 leaflet
S2-Extensions E-book

Follow us:



[Twitter.com/Newtec_Satcom](https://twitter.com/Newtec_Satcom)



Youtube.com/NewtecSatcom



Linkedin.com/company/newtec



Slideshare.net/newtec_satcom

Europe

Tel: +32 3 780 65 00
Fax: +32 3 780 65 49

North-America

Tel: +1 203 323-0042
Fax: +1 203 323-8406

South-America

Tel: +55 11 2092 6220
Fax: +55 11 2093 3756

Asia-Pacific

Tel: +65 6777 22 08
Fax: +65 6777 08 87

China

Tel: +86 10-823 18 730
Fax: +86 10-823 18 731

MENA

Tel: +971 4 390 18 78
Fax: +971 4 368 67 68